


ROHS2.0+HF

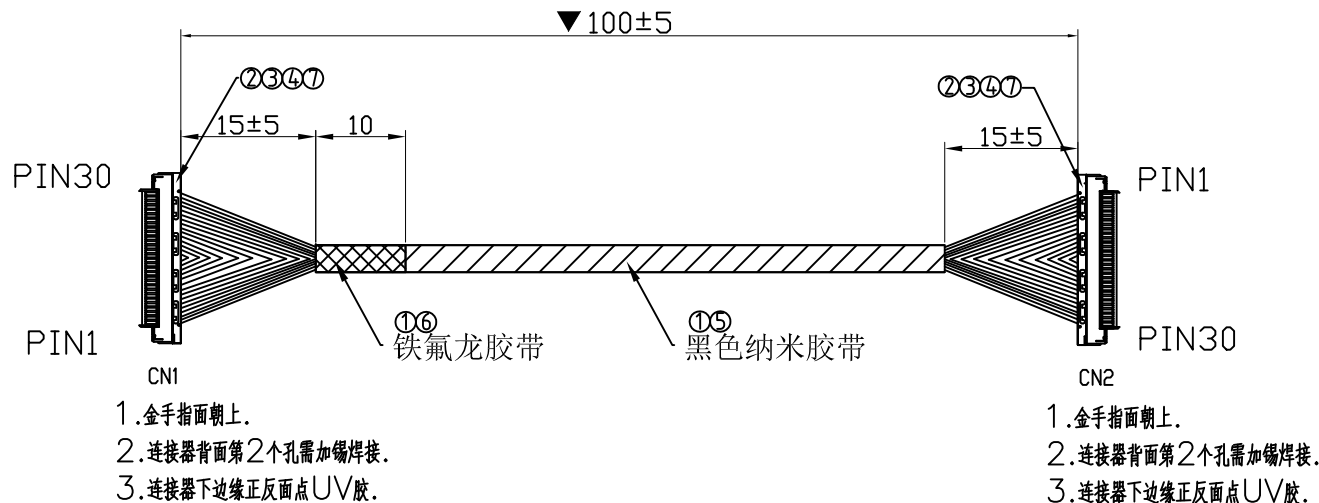

CN1 30Pin Name	CN2 30Pin Name	CABLE TYPE	
1	30	AWG42	Coaxial
2	29	AWG42	Coaxial
3	28	AWG42	Coaxial
4	27	AWG42	Coaxial
5	26	AWG42	Coaxial
6	25	AWG42	Coaxial
7	24	AWG42	Coaxial
8	23	AWG42	Coaxial
9	22	AWG42	Coaxial
10	21	AWG42	Coaxial
11	20	AWG42	Coaxial
12	19	AWG42	Coaxial
13	18	AWG42	Coaxial
14	17	AWG42	Coaxial
15	16	AWG42	Coaxial
16	15	AWG42	Coaxial
17	14	AWG42	Coaxial
18	13	AWG42	Coaxial
19	12	AWG42	Coaxial
20	11	AWG42	Coaxial
21	10	AWG42	Coaxial
22	9	AWG42	Coaxial
23	8	AWG42	Coaxial
24	7	AWG42	Coaxial
25	6	AWG42	Coaxial
26	5	AWG42	Coaxial
27	4	AWG42	Coaxial
28	3	AWG42	Coaxial
29	2	AWG42	Coaxial
30	1	AWG42	Coaxial

技术要求:

- 100%测试, 短路/开路/错位以及间歇性接触不良.
导通阻抗: 3欧姆最大
绝缘阻抗: 10M欧姆最小
直流耐电压/测试时间: DC200V/0.01S
交流耐电压/测试时间: AC100V/0.01S
漏电流最大0.5mA
- 连接器不可有破损、脏污等不良, 线材不可有破皮、刮伤等不良.
- 标有“▼”为重点管控尺寸, ⑧表示修正.
- 此零件所包含环境管理物质应符合科信成系统文件QW-QA-10之规定.
- 填充示意图:



标号	料号	品名	规格	用量
7	91507-U000-0153	UV胶	UV-8806	
6	91503-OBA0-0209	铁氟龙胶带	w: 8mm	1 PCS
5	91503-OBA0-0208	纳米胶带	黑色 w: 10mm	1 PCS
4	91703-TC00-0151	接地铜条	0.5Pitch通用接地铜条	4 PCS
3	91703-0301-0038	铁壳	USL20-30S	2 PCS
2	91801-0001-0200	连接器	USL20-30T	2 PCS
1	91001-L031-0156	线材	42# 镀锡铜线 OD: 0.33mm TDR 50%	30 PCS

CUSTOMER:		CUSTOMER P/N:				
TOLERANCES UNLESS OTHERWISE SPECIFIED		COCENTRA 科信成精密技术(江苏)有限公司 COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.				
0-30	+1	0-30°	±1°	SERIES:		TITLE:
31-100	+2	31°-90°	±3°	APPD:		0.4Pitch 30pin TO 30PIN 100MM
101-250	±3	90°-360°	±6°	CKD:		PART No.:
>250	±4			DR:		CACC100-007
THESE DRAWINGS AND SPECIFICATIONS ARE THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF COCENTRA PRECISION TECHNOLOGY (JIANGSU) Co. LTD.				DWG No.:		
				307-0000-H985		
UNITS		MAT'L	FINISH	SCALE	SHEET	REV.
MM		N/A	N/A	N/A	1/1	A